



01.07.2023

Rebar connections HBT Standard program Armature di ripresa HBT Programma standard	Model Modello	Steel Acciaio Ø MM	Spacing Divisione CM T	Length in CM Lunghezza in CM						Weight ML Peso ML		VRd[kN/m']	
				A	B	C	D	E	F	Sheet and reinforcement Lamiere e armatura	Reinforcement Armatura	C25/30	C30/37
	K120-10-20	10	20	9	15	18	12.2	15	20	4.12	2.75	17.2	18.3
	K150-10-15	10	15	12	15	15	15	18-20	20	5.19	3.63	22.5	23.9
	K150-10-15X	10	15	12	15	18	15	18-20	20	5.59	4.03	20.4	21.7
	K150-10-20	10	20	12	15	18	15	18-20	20	4.58	3.02	22.5	23.9
	K190-10-20	10	20	16	15	18	18.6	22	20	5.23	3.38	24.2	25.7

**Corbel  
Console**

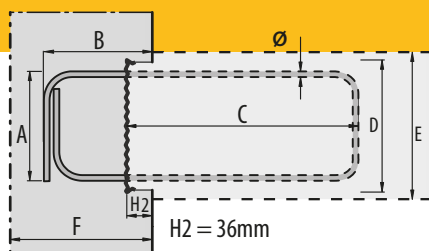

**1<sup>st</sup> stage  
1<sup>a</sup> fase**

**2<sup>nd</sup> stage  
2<sup>a</sup> fase**

Special designs are listed from page 110 onwards.

Le versioni speciali sono riportate a partire dalla pagina 110.

Standard boxes are delivered in lengths of 1.25 or 0.85 m.

Le piastre standard hanno una lunghezza di 1,25 o 0,85 mt.